



BPI COMPONENT GUIDE:

# ORIGINAL BRUSH WAD 12GA


WWW.BALLISTICPRODUCTS.COM

The Original Brush Wad is a symmetrical double-ended gas seal with a G-type impact reduction chamber. It can be loaded either up or down; no orientation is required. It is ideal for short-range brush loads because it evenly distributes pellets for effective lethal shots at ranges of 10 - 35 yards. It is especially effective on first-shot upland loads, rabbit stations, and short to mid-range springing targets. The BW12 also excels for shots such as grouse, quail, pheasant, and woodcock. For even greater spread try supplementing it with the X-Stream Spreader Insert with any load.

The BW12's cupless design makes it a fantastic wad for all types of buckshot loads. It also serves as a cushioned gas seal platform for many slug loads. This is one of our most versatile wads.

## RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and "Load of the Week" at [www.ballisticproducts.com](http://www.ballisticproducts.com)**

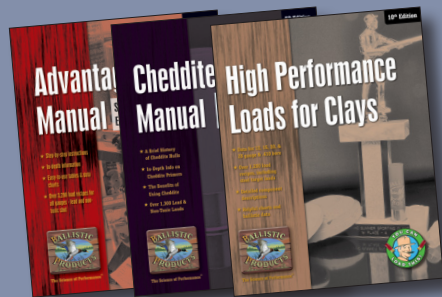

### TECHNICAL SPECS:

OVERALL LENGTH:	0.808"
DIAMETER:	0.728"
SHOTCUP DEPTH:	N/A
SEAL TO CUP BOTTOM:	0.722"
THICKNESS:	N/A



LD12BW12



**WARNING**

Cancer and Reproductive Harm  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
12-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
180108-9769	12	Cheddite	Ched209	Unique	26.0	BPGS	BW12			1 1/8	492.2	Lead #5/#6	10gr Original	8835	1270
120608-3980R-6	12	Remington STS	Rem209P	Green Dot	21.0	NC12	BW12			1 1/8	492.2	Lead #6		10200	1235
180108-9767	12	Cheddite	Ched209	Pro Reach	28.0	BPGS	BW12		0S12	1 1/4	546.9	Lead #5/6	10gr Original	8760	1300
141020-6082	12	Federal PB	Fed209A	Blue Dot	34.0		BW12			1 3/8	601.6	Lead #4		10300	1215

# OTHER USEFUL COMPONENTS



20GA 1/8" CORK WADS  
18CW20 | #1222820



20GA 1/4" CORK WADS  
14CW20 | #1222420



20GA 1/8" FELT WADS  
18FW20 | #1221820



20GA 1/4" FELT WADS  
14FW20 | #1221420



12GA OVERSHOT CARDS  
0S12 | #0S 12

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 20 gauge felt or cork fillers for inside the 12 gauge wads.**

**WARNING:** BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD “AS IS”.

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.