



BPI COMPONENT GUIDE: CLBC

WWW.BALLISTICPRODUCTS.COM

The ribbed walls of the CLBC reduce hull and bore contact, thus reducing contact friction. The unslit design allows for customized pattern control in the field. Slit into 2 - 6 petals at least 3/4 length of the shotcup. Use with straight-walled hulls and add some Mica wad lubricant and buffer to achieve maximum potential.

An excellent wad for lead, steel, and other tungsten-based pellets.

See our Wad Slitting brochure for additional information on the fundamentals of wad slitting.


“★★★★★ - **Wow!** 1-1/4 oz. of #5.5 nickel plated lead moving at 1460 fps using Longshot powder and this wad is a remarkable load!! Those wild Kansas pheasants don't even know what hit them! This is my regular pheasant load now. Excellent wad!!!” - Josh, KS

“★★★★★ - **Buck, ITX, double round ball! #6 lead, steel** I can shoot pretty much anything I want out of the CLBC. Along with mica wad slick this is a universal hunting wad. I love it.” - Mike, AZ

RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We

offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and “Load of the Week” at www.ballisticproducts.com**

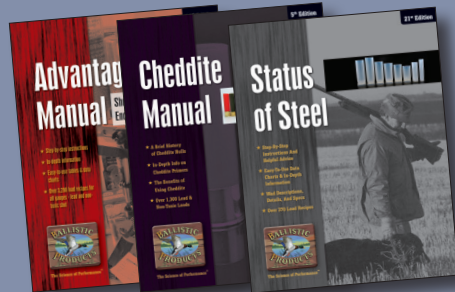

MYLAR: STEEL AND TUNGSTEN SHOTSHELL PELLETS ARE AS HARD OR HARDER THAN A SHOTGUN'S BORE AND BARRELS. BECAUSE THESE PELLETS ARE VERY HARD, THEY ARE ABRASIVE AND CAN CAUSE BARREL DAMAGE IF THE SHOT PROTRUDES THROUGH THE WAD SLIT OR OTHERWISE COMES INTO DIRECT CONTACT WITH THE BORE/BARREL. NO WAD OR COMPONENT CAN ALTER THE REALITY OF PHYSICS. HARD SHOTSHELL PELLETS CAN CAUSE DAMAGE. AS AN INSURANCE POLICY TO REDUCE THE CHANCES OF BARREL DAMAGE DUE TO ABRASIVE PELLETS, MYLAR WRAPS ARE ALWAYS A VERY GOOD IDEA AND MAY BE ADDED TO ANY LOAD.



NOTE: NO WAD CAN COMPLETELY ELIMINATE THE RISK OF SCORING OR ABRASION. PELLET MATERIALS HARDER THAN YOUR GUN'S BARREL CAN STILL CAUSE DAMAGE. HOWEVER, THIS WAD IS MOLDED IN HIGH-DENSITY MATERIAL AND WILL PROVIDE MAXIMUM PROTECTION. FOLLOW ONLY TESTED AND PUBLISHED LOAD DATA. **READ A LOADING MANUAL BEFORE YOU START TO LOAD.**

SPECIFICATIONS

OVERALL LENGTH:	1.805"
DIAMETER:	0.725"
SHOTCUP DEPTH:	1.160"
SEAL TO CUP BOTTOM:	0.750"
THICKNESS:	0.050"



LD12CLBC



WARNING

Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
12-GAUGE • 2-3/4" LENGTH • BPX-12 DEVASTATOR SHOT • FOLD CRIMP															
10934	12	Cheddite	Ched209	Longshot	28.5		CLBC (slit)	14CW20 in base	OS12	1 1/8	492.2	BPX-12 #5	20gr Mix #47	8400	1315
10933	12	Fiocchi	Fio616	Longshot	27.5		CLBC (slit)	14CW20 in base	OS12	1 1/8	492.2	BPX-12 #5		8900	1330
10944	12	Cheddite	Ched209	Longshot	28.8		CLBC (slit)	18CW20 in base		1 1/4	546.9	BPX-12 #5	18gr Original	8800	1295
12-GAUGE • 2-3/4" LENGTH • SPHEROTUNGSTEN ORIGINAL-15 SHOT • FOLD CRIMP															
10947	12	Fiocchi	Fio616	Longshot	29.2		CLBC (slit)	14CW20 in base	OS12	1 1/4	546.9	ST Original-15 #7		8700	1305
12-GAUGE • 3" LENGTH • LEAD SHOT • FOLD CRIMP															
11112-151	12	Fiocchi	Ched209	Blue Dot	35.0		CLBC (slit)	18FW20 in base		1 3/8	601.6	Lead #4		9900	1255
12-GAUGE • 3" LENGTH • STEEL SHOT • FOLD CRIMP															
160504-8044	12	Cheddite	Ched209	Longshot	35.0	BPGS	CLBC (slit)			7/8	382.8	Steel #2/BB		9600	1595
160519-8107	12	Federal PB	Fed209A	Pro Reach	36.5	BPGS	CLBC (slit)	18FW20 in base		7/8	382.8	Steel #2		11000	1710
12-GAUGE • 3-1/2" LENGTH • STEEL SHOT • FOLD CRIMP															
160427-8022	12	Cheddite	Ched209	Pro Reach	39.0	FS12	CLBC (slit)			7/8	382.8	Steel #2/BB	10gr Original	9500	1660
160429-8033-BB	12	Cheddite	Ched209	Pro Reach	40.0	(2) BPGS	CLBC (slit)		OS12	7/8	382.8	Steel #BB		10200	1725

OTHER USEFUL COMPONENTS



20GA 1/8" CORK WADS
18CW20 | #1222820




20GA 1/4" CORK WADS
14CW20 | #1222420



20GA 1/8" FELT WADS
18FW20 | #1221820



20GA 1/4" FELT WADS
14FW20 | #1221420



12GA OVERSHOT CARDS
OS12 | #OS 12

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 20 gauge felt or cork fillers for inside the 12 gauge wads.**

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.