



BPI COMPONENT GUIDE:

# COMPETITION SPECIAL

WWW.BALLISTICPRODUCTS.COM


The Competition Special is built for consistency and performance.

Designed for 1 oz. and 1-1/8 oz. lead payloads, the Competition Special is for high-volume shooters. Though very reasonably priced, this wad is still laden with many features that have helped it receive acclaim for performance and consistency in the shooting world. Snap away petals break away after firing, allowing the shot charge to be unaffected thus resulting in a consistent performance with each pull of the trigger.

“★★★★★ - **Sporting Clays Work Horse** This wad is a sporting clays work horse. It is a great all around wad for 1 oz. loads. Want to break more sporting clays this is the wad to use.” - Will, TX

## RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and “Load of the Week” at [www.ballisticproducts.com](http://www.ballisticproducts.com)**

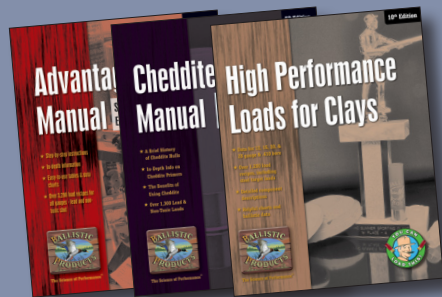

### TECHNICAL SPECS:

OVERALL LENGTH:	1.645"
DIAMETER:	0.720"
SHOTCUP DEPTH:	0.848"
SEAL TO CUP BOTTOM:	0.785"
THICKNESS:	0.050"



LD12CS12



**WARNING**

Cancer and Reproductive Harm  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
12-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
60421-1338	12	Cheddite	Fio616	Clays	19.0		CS12			1 1/8	492.2	Lead		10600	1200
220927-11408	12	Fed. GM Grand	Ched209	Clays	18.0		CS12			1 1/8	492.2	Lead #8		10400	1157
171011-9649	12	Federal PB	Fed209A	Unique	22.5		CS12			1 1/8	492.2	Lead #7.5		6600	1175
100325-1914T	12	Fiocchi	Fio616	700-X	17.9		CS12			1 1/8	492.2	Lead #7.5		9600	1200
100326-1942T	12	Fiocchi	Fio616	Clays	19.0		CS12			1 1/8	492.2	Lead #7.5		9900	1200
100326-1943T	12	Fiocchi	Fio616	e3	17.6		CS12			1 1/8	492.2	Lead #7.5		9900	1200
100326-1933T	12	Fiocchi	Fio616	Green Dot	20.7		CS12			1 1/8	492.2	Lead #7.5		9400	1200
120511-3850	12	Fiocchi	Fio616	International	18.3		CS12		OS12	1 1/8	492.2	Lead #7.5		8300	1110
120511-3851	12	Fiocchi	Fio616	International	19.1		CS12			1 1/8	492.2	Lead #7.5		8600	1170
10909	12	Fiocchi	Fio616	Universal	26.0		CS12		OS12	1 1/8	492.2	NP Lead	10gr Original	9300	1310
180119-9797	12	Fiocchi	Fio616	Win. 572	30.0		CS12		OS12	1 1/8	492.2	Lead#6		7260	1360

## OTHER USEFUL COMPONENTS



**20GA 1/8" CORK WADS**  
18CW20 | #1222820




**20GA 1/4" CORK WADS**  
14CW20 | #1222420



**20GA 1/8" FELT WADS**  
18FW20 | #1221820



**20GA 1/4" FELT WADS**  
14FW20 | #1221420



**12GA OVERSHOT CARDS**  
OS12 | #OS 12

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 20 gauge felt or cork fillers for inside the 12 gauge wads.**

**WARNING:** BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.