



BPI COMPONENT GUIDE:

078 LIGHTNING

WWW.BALLISTICPRODUCTS.COM


The Lightning is made specifically for light, high-velocity loads. The Lightning features five separate gas separation levels and four independent layers of cushioning to ensure a well-developed powder burn, protected pellets, and high velocities. Almost all high-speed target powders can be used with the Lightning 7/8 oz. wad.

“★★★★★ - **Dustin' birds** Found the wad I was looking for. Nice recoil and can track the wad in my pattern” - Scott, IA

“★★★★★ - **lightning wad** This is the same wad Fiocchi uses in their 7/8oz Trainer load at 1200 fps and their 1 oz. Shooting Dynamics at 1200 fps. I've had great results duplicating those loads with this wad.” - Jack

RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and “Load of the Week” at www.ballisticproducts.com**

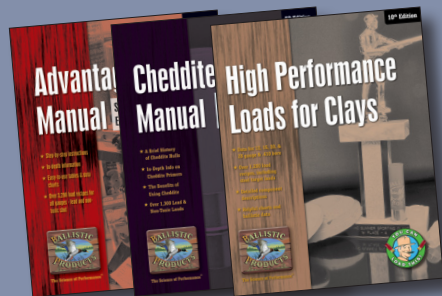

TECHNICAL SPECS:

OVERALL LENGTH:	1.720"
DIAMETER:	0.725"
SHOTCUP DEPTH:	0.600"
SEAL TO CUP BOTTOM:	1.120"
THICKNESS:	0.035"



LD12L078



WARNING

Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
12-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
130211-4580	12	Cheddite	Ched209	700-X	26.0		L078	(2) 18FW20 in base		5/8	273.4	Lead #9		10000	1765
120120-3645	12	Cheddite	Ched209	e3	24.0		L078			3/4	328.1	Lead #6		9100	1580
120120-2634	12	Cheddite	Ched209	International	33.0		L078			3/4	328.1	Lead		9700	1780
160901-8346	12	Cheddite	Ched209	Extra-Lite	18.0		L078			7/8	382.8	Lead #7.5		9400	1300
120907-4213	12	Cheddite	Ched209	International	27.5		L078			7/8	382.8	Lead #8		8700	1515
141114-6125-9	12	Cheddite	Ched209	W S Handicap	28.0		L078		0S12	7/8	382.8	Lead #9		10700	1600
4457R	12	Fiocchi	Fio616	Green Dot	23.0		L078			7/8	382.8	Lead		9600	1350
110105-2670	12	Fiocchi	Fio616	Titewad	20.0		L078			7/8	382.8	Lead #8		10600	1350
11248	12	Remington STS	CCI209	Clays	17.7		L078			7/8	382.8	Lead		7603	1255
151211-7523	12	Winchester AA HS	Win209	W S Handicap	25.0		L078			7/8	382.8	Lead #5		11000	1550
12-GAUGE • 2-3/4" LENGTH • BISMUTH SHOT • FOLD CRIMP															
161007-9039	12	Cheddite	Ched209	W S Handicap	22.0		L078			7/8	382.8	Bismuth #6	12gr BSB	6800	1295

OTHER USEFUL COMPONENTS



20GA 1/8" CORK WADS
18CW20 | #1222820




20GA 1/4" CORK WADS
14CW20 | #1222420



20GA 1/8" FELT WADS
18FW20 | #1221820



20GA 1/4" FELT WADS
14FW20 | #1221420



12GA OVERSHOT CARDS
0S12 | #0S 12

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 20 gauge felt or cork fillers for inside the 12 gauge wads.**

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.