



BPI COMPONENT GUIDE:

REX-24

WWW.BALLISTICPRODUCTS.COM

Designed for stinging 7/8 oz. loads (like the Curmudgeon's famous "Killer Bee" loads) in straight-walled hulls such as Cheddite, Fiocchi, Rio, Federal Gold Medal, or Remington SP-types. The elaborate gas seal column progressively absorbs energy during acceleration to peak velocity. The results are less deformed pellets, less recoil and incredibly fast loads. The REX-24 features three levels of cushions and eight rings of side hull support. This wad even has recipes for 3/4 oz. loads.

Our test data from the lab shows Rex to be very consistent from shot-to-shot; very little deviation. This wad is used in Killer Bee/Zip loads, very light and fast, e.g., 3/4 oz. at 1520 fps.


Great for dove and pigeon shooters.

Technical:

Best when used in straight walled hulls; designed to take advantage of the internal capacity by maximizing the cushion section.

RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and "Load of the Week" at www.ballisticproducts.com**

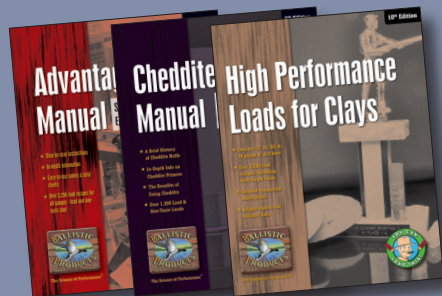

TECHNICAL SPECS:

OVERALL LENGTH:	1.735"
DIAMETER:	0.725"
SHOTCUP DEPTH:	0.690"
SEAL TO CUP BOTTOM:	1.045"
THICKNESS:	0.030"



LD12REX



WARNING

Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
12-GAUGE • 2-1/2" LENGTH • LEAD SHOT • FOLD CRIMP															
130812-4950	12	Cheddite	Ched209	Green Dot	18.0		REX-24			3/4	328.1	Lead #8/7.5/7/6		7100	1135
12-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
130204-4555	12	Cheddite	Ched209	Clays	24.0		REX-24	(2) 18FW20 in base		9/16	246.1	Lead #9		9400	1735
101220-2651	12	Fiocchi	Fio616	International	24.0		REX-24			3/4	328.1	Lead #8		8400	1430
101220-2650	12	Fiocchi	Fio616	International	26.0		REX-24			3/4	328.1	Lead #8		9100	1550
120209-3676	12	Remington STS	Rem209P	Red Dot	17.0		REX-24			3/4	328.1	Lead #9		8800	1270
110107-2691	12	Winchester AA HS	Win209	Titewad	19.5		REX-24			3/4	328.1	Lead #9		11000	1440
101220-2647	12	Fiocchi	Fio616	Clays	22.0		REX-24				370.0	Lead #8		9700	1410
101220-2649	12	Fiocchi	Fio616	International	28.0		REX-24				370.0	Lead #8		10700	1600
221019-11441	12	Fed. GM Grand	Ched209	Titewad	17.1		REX-24			7/8	382.8	Lead #8		9500	1110
170328-9312	12	Remington STS	Fed209A	Green Dot	18.0		REX-24			7/8	382.8	Lead #6		8800	1250

OTHER USEFUL COMPONENTS



20GA 1/8" CORK WADS
18CW20 | #1222820




20GA 1/4" CORK WADS
14CW20 | #1222420



20GA 1/8" FELT WADS
18FW20 | #1221820



20GA 1/4" FELT WADS
14FW20 | #1221420



12GA OVERSHOT CARDS
0S12 | #0S 12

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 20 gauge felt or cork fillers for inside the 12 gauge wads.**

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.