



BPI COMPONENT GUIDE:

SUPER SPARK

WWW.BALLISTICPRODUCTS.COM


The Super Spark was designed from the ground up as a 7/8 ounce performer. A complex, five-layer gas seal system is compatible with fast-burn rate powders.

The Super Spark also features an advanced, spring-mesh cushion system designed to absorb shock and energy, reducing felt recoil.

“★★★★★ - **Awesome wad!!** This wad is awesome for light trap loads. I've been using this wad for several years. Seems to smoke clays with any gun/powder/shot size combination. Very happy with this wad.” - Josh, KS

RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and “Load of the Week” at www.ballisticproducts.com**

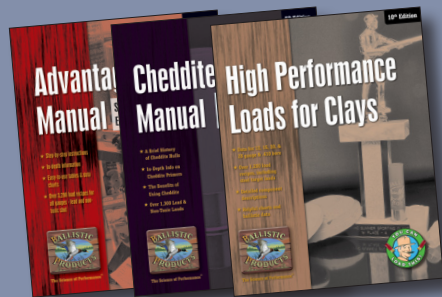

TECHNICAL SPECS:

OVERALL LENGTH:	1.730"
DIAMETER:	0.725"
SHOTCUP DEPTH:	0.730"
SEAL TO CUP BOTTOM:	1.00"
THICKNESS:	0.035"



LD12SPK



WARNING

Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
12-GAUGE • 2-1/2" LENGTH • LEAD SHOT • FOLD CRIMP															
130812-4951	12	Cheddite	Ched209	Green Dot	20.0		SPARK			3/4	328.1	Lead #8/7.5/7/6		7300	1215
130812-4952	12	Cheddite	Ched209	International	20.0		SPARK			3/4	328.1	Lead #8/7.5/7/6		7400	1175
12-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
110110-2705	12	Federal PB	Fed209A	International	23.0		SPARK		0S12	3/4	328.1	Lead #8		9200	1490
110110-2707	12	Fiocchi	Fio616	Clays	26.0		SPARK			3/4	328.1	NP Lead #6		11000	1655
140416-5613	12	Remington STS	Rem209	Clays	20.0		SPARK			3/4	328.1	Lead #8		9500	1395
101220-2636	12	Fiocchi	Fio616	e3	23.0		SPARK				370.0	Lead #8		10300	1520
130417-4708	12	Cheddite	N209	700-X	22.0		SPARK		0S12	7/8	382.8	Lead #7.5		10100	1455
130417-4709	12	Cheddite	N209	Titewad	21.0		SPARK		0S12	7/8	382.8	Lead #7.5		10600	1420
130417-4711	12	Fiocchi	N209	American Select	22.0		SPARK		0S12	7/8	382.8	Lead #7.5		9600	1385
130422-4715	12	Remington STS	N209	Red Dot	19.0		SPARK			7/8	382.8	Lead #8		9500	1300
11249	12	Winchester AA HS	Win209	Clays	19.1		SPARK			7/8	382.8	Lead		10625	1345
170109-9167	12	Cheddite	Ched209	W S Handicap	23.0		SPARK		0S12	1	437.5	Lead #7.5		9200	1335

OTHER USEFUL COMPONENTS



20GA 1/8" CORK WADS
18CW20 | #1222820




20GA 1/4" CORK WADS
14CW20 | #1222420



20GA 1/8" FELT WADS
18FW20 | #1221820



20GA 1/4" FELT WADS
14FW20 | #1221420



12GA OVERSHOT CARDS
0S12 | #0S 12

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 20 gauge felt or cork fillers for inside the 12 gauge wads.**

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.