



BPI COMPONENT GUIDE:

SHORT RANGE CRUSHER



WWW.BALLISTICPRODUCTS.COM

The underside of the gas seal on the Short Range Crusher (SRC) has 25 plastic teeth to strategically displace the propellant chamber, thus facilitating a controlled flame in low volume/fast burn powders. Three stage VZ-cage design reduces recoil with progressive compression during acceleration. This works like a crumple zone in high-end automotive design, cushioning setback.

“★★★★★ - **BPs Little Secret** During this winter I decided to use some of the time experimenting with different trap loads. I bought some wads from BP including the SRCs. ... The load is nothing short of unbelievable. At the 16 yard line it annihilates targets with regularity. I used the load all the way back to the 27 yard line. Even at that distance I was smokin targets. The only negative is the fact that they are pricey.” - MJ, CA

RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and “Load of the Week” at www.ballisticproducts.com**

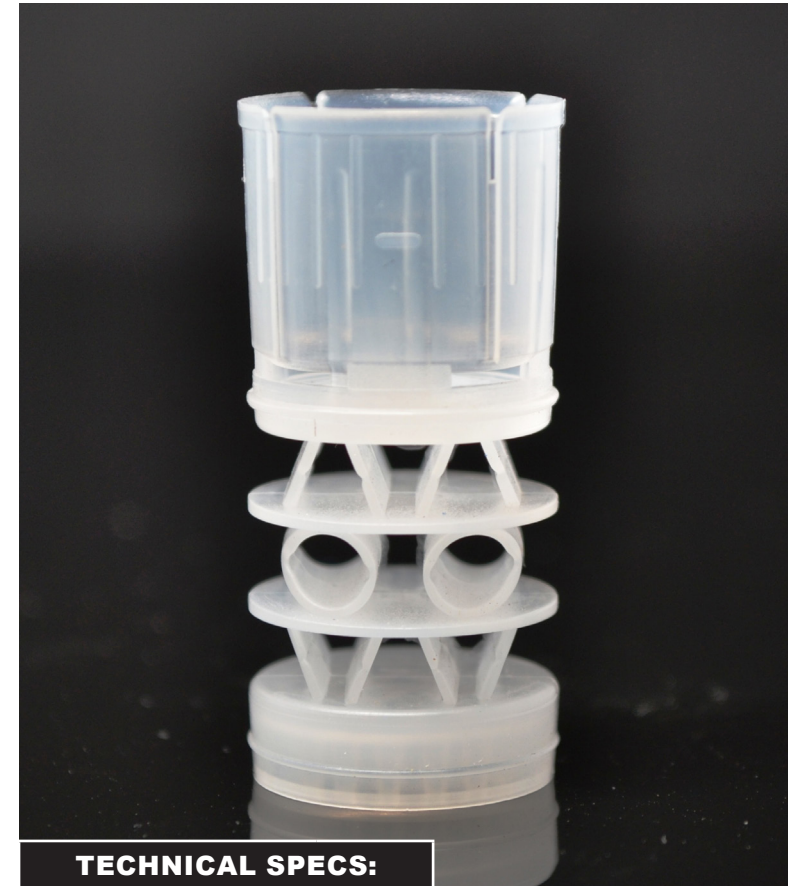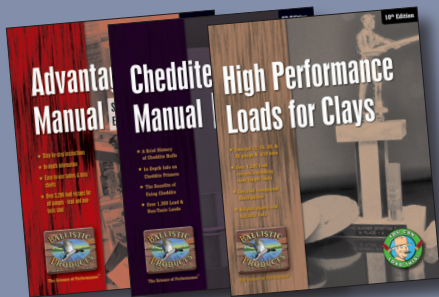

TECHNICAL SPECS:

OVERALL LENGTH:	1.619"
DIAMETER:	0.725"
SHOTCUP DEPTH:	0.685"
SEAL TO CUP BOTTOM:	0.915"
THICKNESS:	0.035"



LD12SRC



WARNING

Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
12-GAUGE • 2-1/2" LENGTH • BISMUTH SHOT • ROLL CRIMP															
160719-8226	12	Cheddite	Ched209	700-X	18.0		SRC		COS12	3/4	328.1	Bismuth #4/6/7		7800	1320
12-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
141204-6145	12	Cheddite	Ched209	700-X	24.0		SRC			3/4	328.1	Lead #7.5		9700	1575
141204-6157X75	12	Cheddite	Ched209	International	28.0		SRC	X-Stream Spreader		3/4	328.1	Lead #7.5		8900	1555
151214-7526	12	Winchester AA HS	Win209	W S Handicap	28.0		SRC	18FW20 in base		3/4	328.1	Lead #7		10800	1710
130103-4497	12	Fiocchi	Fio616	700-X	23.0		SRC				370.0	Lead #7.5		9900	1495
130103-4504	12	Fiocchi	Fio616	Red Dot	24.0		SRC				370.0	Lead #7.5		10000	1490
150102-6204	12	Cheddite	Ched209	Bullseye	24.0		SRC		OS12	7/8	382.8	Lead #7		10400	1500
150105-6216	12	Cheddite	Ched209	W S Handicap	24.0	BPGS	SRC			1	437.5	Lead #8		8900	1315
970307-307E	12	Fiocchi	Ched209	American Select	22.0		SRC		COS12	1	437.5	Lead #8		10700	1350
140917-6005	12	Cheddite	Ched209	Longshot	35.0		SRC			1 1/8	492.2	Lead #7.5/7		9200	1580
12-GAUGE • 2-3/4" LENGTH • BISMUTH SHOT • FOLD CRIMP															
170831-9588	12	Federal PB	Fed209A	Green Dot	25.0		SRC			7/8	382.8	Bismuth #5		7600	1435

OTHER USEFUL COMPONENTS



20GA 1/8" CORK WADS
18CW20 | #1222820




20GA 1/4" CORK WADS
14CW20 | #1222420



20GA 1/8" FELT WADS
18FW20 | #1221820



20GA 1/4" FELT WADS
14FW20 | #1221420



12GA OVERSHOT CARDS
OS12 | #OS 12

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 20 gauge felt or cork fillers for inside the 12 gauge wads.**

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.