



BPI COMPONENT GUIDE:

SHORT SHELL WAD

WWW.BALLISTICPRODUCTS.COM

The SSW is a short wad with a compact cushion section. It is great for short-chamber loads and for high capacity loads in longer shotshells.


With the right loads, fine shotguns can pack a punch. We have great loads for short-length cartridges (2-1/4" and 2-1/2") using common hulls and powders. We have designed certain loads with the SSW that operate with low pressures and low recoil for fine old guns (and fine old shooters).

Try the short loads with the SSW for yourself and enjoy the benefits.

"★★★★★ - **SHORT SHELL WADS** Love these wads!! use them for making little 2" and 2.25" shells with roll crimps. Less recoil and perfect for new shooters. The shells just look less intimidating. I cut down hulls that are near the end of their useful life, and then toss them after they are fired. Very useful wads." - IN

RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and "Load of the Week" at www.ballisticproducts.com**

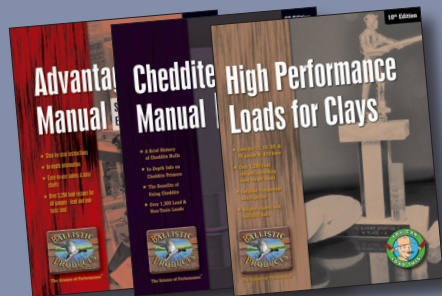

TECHNICAL SPECS:

OVERALL LENGTH:	1.424"
DIAMETER:	0.720"
SHOTCUP DEPTH:	0.852"
SEAL TO CUP BOTTOM:	0.685"
THICKNESS:	0.030"



LD12SSW



WARNING

Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
12-GAUGE • 2" LENGTH • LEAD SHOT • ROLL CRIMP															
10908-N1	12	Fiocchi	Fio616	Titewad	14.0		SSW		NC12	7/8	382.8	Lead		9500	1260
12-GAUGE • 2-1/4" LENGTH • LEAD SHOT • ROLL CRIMP															
409013-533	12	Cheddite	Ched209	Bullseye	14.0		SSW	18FW20 in base	NC12	7/8	382.8	Lead		8100	1130
50330-701	12	Cheddite	Ched209	International	16.0		SSW	18FW12 in base	NC12	7/8	382.8	Lead		7800	1150
50330-R	12	Fiocchi	Fio616	Bullseye	16.0		SSW	18FW20 in base	NC12	7/8	382.8	Lead		8200	1200
50324-685R	12	Fiocchi	Fio616	Titewad	12.0		SSW	18FW20 in base	NC12	7/8	382.8	Lead		7100	1000
12-GAUGE • 2-1/2" LENGTH • LEAD SHOT • ROLL CRIMP															
50324-686	12	Fiocchi	Fio616	Titewad	16.0	BPGS	SSW	18FW20 in base	COS12	3/4	328.1	Lead		8700	1275
50324-672	12	Fiocchi	Fio616	Bullseye	17.0		SSW	18FW20 in base	COS12	7/8	382.8	Lead		9400	1295
50324-677	12	Fiocchi	Fio616	Green Dot	18.0		SSW	18FW20 in base	COS12	7/8	382.8	Lead		9300	1265
50324-685	12	Fiocchi	Fio616	Titewad	12.0	BPGS	SSW	18FW20 in base	COS12	7/8	382.8	Lead		7000	1000
50324-673	12	Fiocchi	Fio616	Bullseye	15.0		SSW		COS12	1	437.5	Lead		9700	1210

OTHER USEFUL COMPONENTS



20GA 1/8" CORK
WADS
18CW20 | #1222820




20GA 1/4" CORK
WADS
14CW20 | #1222420



20GA 1/8" FELT
WADS
18FW20 | #1221820



20GA 1/4" FELT
WADS
14FW20 | #1221420



12GA OVERSHOT
CARDS
OS12 | #OS 12

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 20 gauge felt or cork fillers for inside the 12 gauge wads.**

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.