



BPI COMPONENT GUIDE:

Z21 TRAP COMMANDER 12GA


WWW.BALLISTICPRODUCTS.COM

The Trap Commander makes easy work of long shots. This may be the slickest wad you'll will ever run through your single-stage or progressive reloading machine. The design even improves final crimps by adjusting to a final "nudge" as the shell is closed, compressed for solid ignition.

The shotcup section holds a 1-1/8 ounce payload. Improved patterns and solid performance make this wad a crossing shot specialist. Great for crossing and handicap trap-shots. Also available in 16 and 20 gauge.

RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and "Load of the Week" at www.ballisticproducts.com**

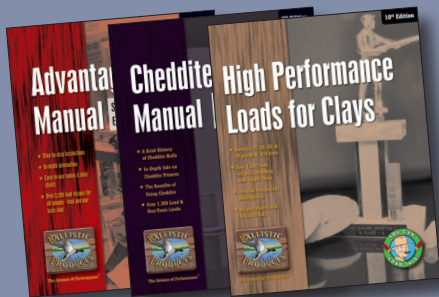

TECHNICAL SPECS:

OVERALL LENGTH:	1.585"
DIAMETER:	0.729"
SHOTCUP DEPTH:	0.735"
SEAL TO CUP BOTTOM:	0.850"
THICKNESS:	0.035"



LD12Z21



WARNING

Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
12-GAUGE • 2-1/2" LENGTH • LEAD SHOT • ROLL CRIMP															
100727-2288A	12	Cheddite	Ched209	International	18.0		Z21		CO512	7/8	382.8	Lead #7		7500	1080
12-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
160406-7972	12	Cheddite	Ched209	Pro Reach	40.0		Z21			1	437.5	Lead #7.5		10400	1755
160422-8012	12	Federal PB	Fed209A	Pro Reach	39.5		Z21	18FW20 in base		1	437.5	Lead #4/5/6		10800	1740
160406-7974	12	Cheddite	Ched209	Longshot	40.0		Z21		OS12	1 1/16	464.8	Lead #4/5/6		9000	1630
230817-11941.1	12	Cheddite	Ched209	Longshot	37.0		Z21		OS12	1 1/8	492.2	NP Lead #4	18gr Original	8865	1551
160406-7973	12	Federal PB	Ched209	Longshot	37.5		Z21		OS12	1 1/8	492.2	Lead #4/5/6		11000	1620
90908-1276	12	Fiocchi	Fio616	Alliant 20/28	28.0		Z21			1 1/8	492.2	Lead #7		9100	1395
100326-1944	12	Fiocchi	Fio616	e3	18.0		Z21			1 1/8	492.2	Lead #7.5		10000	1225
100326-1935T	12	Fiocchi	Fio616	Green Dot	20.8		Z21			1 1/8	492.2	Lead #7.5		9200	1200
151217-7565	12	Cheddite	Ched209	Pro Reach	34.0		Z21			1 1/4	546.9	Lead #5/4		10400	1455
12-GAUGE • 3" LENGTH • LEAD SHOT • FOLD CRIMP															
151216-7545	12	Cheddite	Ched209	Pro Reach	38.0	BPGS	Z21			1 1/8	492.2	Lead #5/4		10500	1695

OTHER USEFUL COMPONENTS



20GA 1/8" CORK WADS
18CW20 | #1222820




20GA 1/4" CORK WADS
14CW20 | #1222420



20GA 1/8" FELT WADS
18FW20 | #1221820



20GA 1/4" FELT WADS
14FW20 | #1221420



12GA OVERSHOT CARDS
OS12 | #OS 12

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 20 gauge felt or cork fillers for inside the 12 gauge wads.**

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.