



BPI LOAD GUIDE:

BP2092 QUASAR

WWW.BALLISTICPRODUCTS.COM

20GA 3" MULTI-METAL WAD

BP wads are better than ever. Our high-quality BP line of wads are updated and molded in the USA by our good friends at Claybuster.

The BP2092 Quasar is manufactured with our toughest TPS molding resin. It is designed with Multi-Metal capabilities to accommodate heavy payloads in 20 gauge 3". Our ballistic lab is producing all-new load data for the BP2092 that will include lead, steel, bismuth, BPX-12, SpheroTungsten 15.0, and SpheroTungsten 18.0. (Load data for the original PT2092 wad does not apply to the BP2092 Quasar).

Our lab marvels at the many high-performance field loads in lead, steel, tungsten, and bismuth configurations. The BP2092 Quasar is a unique wad with numerous field applications.

A note on tabbed petals: We often receive questions on the purpose of petal tabs. "Tabs" are the small molded points that bind the shotcup petals together. The ONLY reason for these tabs is to eliminate nesting in automated wad feeders during the commercial loading process. Since the BP2092 Quasar is made of a very resilient material, it is possible that some tabs may not break completely during firing. It is recommended that the handloader sever these tabs prior to loading. This process is very quick and easy: Simply slide a partially open pair of snips or scissors down each slit. The tabs will magically pop open.



MADE IN USA

QUASAR BP2092

Overall Length:	1.860"
Shotcup Depth:	1.619"
Gas Seal Diam:	0.631"
Gas Seal Depth:	0.125"
Cushion Height:	NA
Weight:	31.8 grains

Features

- Maximum-capacity 20ga 3" shotcup.
- Varied load payloads and shot types.
- Seal-Slit Technology.
- Tabbed shotcup petals eliminate nesting.

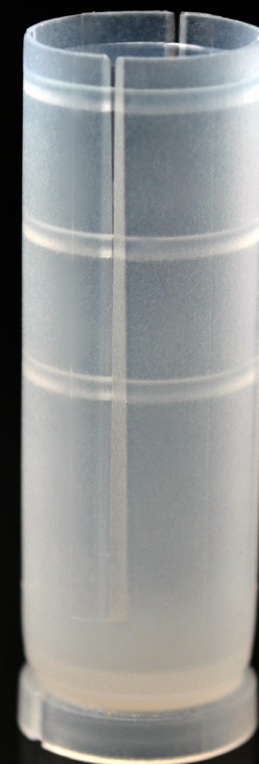

To slit with Snips, one does not need to utilize a scissor motion. Simply open the snips slightly and slide the snips toward the base of the wad.

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
20-GAUGE • 3" LENGTH • BISMUTH SHOT • FOLD CRIMP															
11506	20	Cheddite	Ched209 HOT	Lil' Gun	29.5		BP2092	NC32 in base	OS20	1 1/8	492.2		10 grains BSB	10500	1230
20-GAUGE • 3" LENGTH • BPX-12 DEVASTATOR SHOT • FOLD CRIMP															
11468	20	Cheddite	Ched209	Lil' Gun	31.1		BP2092	FC410 (cut to 1/4") in base	OS20	1 1/8	492.2	#4		8387	1223
11469	20	Cheddite	Ched209 HOT	Lil' Gun	31.1		BP2092	FC410 (cut to 1/4") in base	OS20	1 1/8	492.2	#4		9280	1253
11520.2	20	Cheddite	Ched209 HOT	Lil' Gun	27.0		BP2092	NC32 in base	OS20	1 3/8	601.6			11350	1108
11521.2	20	Fiocchi	Fio616	Lil' Gun	26.0		BP2092	NC32 in base	OS20	1 3/8	601.6			11500	1076
20-GAUGE • 3" LENGTH • SPHEROTUNGSTEN ORIGINAL-15 SHOT • FOLD CRIMP															
11522	20	Fiocchi	Fio616	Lil' Gun	26.2	N720	BP2092	FC32 (trim 1/8") in base	OS20	1 3/8	601.6	#7		10300	1076
11526	20	Fiocchi	Fio616	Lil' Gun	27.6	N720	BP2092	FC32 (trim 1/8") in base	OS20	1 3/8	601.6	#7		8500	1065
20-GAUGE • 3" LENGTH • SPHEROTUNGSTEN SUPER MAX-18 SHOT • FOLD CRIMP															
11525	20	Cheddite	Ched209 HOT	Lil' Gun	28.0		BP2092	FC32 + NC32 in base	N720	1 3/8	601.6			9890	1102
11524	20	Cheddite	Ched209 HOT	Lil' Gun	29.2		BP2092	FC32 + NC32 in base	OS20	1 3/8	601.6			9610	1120
20-GAUGE • 3" LENGTH • STEEL SHOT • FOLD CRIMP															
11503	20	Cheddite	Ched209 HOT	Longshot	17.5		BP2092	NC32 in base	OS20	7/8	382.8	#5		10100	1191
11504	20	Cheddite	Ched209 HOT	Longshot	18.5		BP2092	NC32 in base	OS20	7/8	382.8	#5		10900	1213
11498	20	Cheddite	Ched209 HOT	Steel	19.0		BP2092	NC32 in base	OS20	7/8	382.8	#5		9800	1245
11500	20	Cheddite	Ched209 HOT	Lil' Gun	29.6		BP2092	NC32 in base	OS20		400.0	#5		9000	1260
11501	20	Cheddite	Ched209 HOT	Lil' Gun	30.6		BP2092	NC32 in base	OS20		400.0	#5		9550	1300
11502	20	Cheddite	Ched209 HOT	Lil' Gun	32.0		BP2092	NC32 in base	OS20		400.0	#5		9700	1327

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".