



BPI COMPONENT GUIDE:

# 20GA BRUSH WAD

WWW.BALLISTICPRODUCTS.COM

The Brush Wad is a symmetrical cushioned wad platform with a very short shotcup. This design enhances wider patterns and improved short-range performance with a peripheral shot spread. Brush Wads are extremely consistent in our lab testing and very effective in the field. Try Brush Wads and open up a whole new pattern potential from your shotgun


Optimum range: 10-35 yards

Short range, springing targets and overhead shots, upland hunting

“★★★★☆- **Versatile wads** I've used these for 1 oz. Clays loads. Don't let the recommended range fool you.” - Jeff

## RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and “Load of the Week” at [www.ballisticproducts.com](http://www.ballisticproducts.com)**

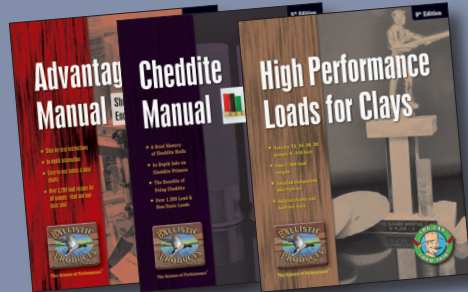

### TECHNICAL SPECS:

OVERALL LENGTH:	1.185"
DIAMETER:	0.615"
SHOTCUP DEPTH:	0.280"
SEAL TO CUP BOTTOM:	0.942"
THICKNESS:	0.035"



LD20BW20




**WARNING**


Cancer and Reproductive Harm  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
20-GAUGE • 2-1/2" LENGTH • LEAD SHOT • ROLL CRIMP															
60919-57	20	Fiocchi	Fio616	Universal	18.0		BW20		N720	3/4	328.1	Lead		8500	1190
60919-55	20	Fiocchi	Fio616	International	14.0		BW20		N720	7/8	382.8	Lead		8600	1115
60919-58	20	Fiocchi	Fio616	Longshot	18.0		BW20		N720	7/8	382.8	Lead		8000	1180
20-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
90717-1032	20	Fiocchi	Fio616	Universal	26.0	NC20	BW20			5/8	273.4	Lead		11400	1720
90908-1289	20	Fiocchi	Fio616	Alliant 20/28	23.0		BW20		OS20	3/4	328.1	Lead #8		10600	1565
90511-829	20	Fiocchi	Fio616	Universal	20.0		BW20		NC20	3/4	328.1	Lead #8.5		10100	1420
100310-1846	20	Remington STS	Rem209P	Alliant 20/28	16.0		BW20	X-Stream Spreader		3/4	328.1	Lead #8		9400	1255
110110-2703	20	Remington STS	Rem209P	International	12.5		BW20		OS20	3/4	328.1	Lead #8		9300	1140
90908-1291	20	Fiocchi	Rio209	Alliant 20/28	22.0		BW20			7/8	382.8	Lead #8		11100	1465
100310-1847	20	Remington STS	Rem209P	Alliant 20/28	16.0		BW20			7/8	382.8	Lead #9		10200	1250
90908-1292	20	Fiocchi	CCI209	Alliant 20/28	18.0		BW20			1	437.5	Lead #8		11100	1260

## OTHER USEFUL COMPONENTS



**20GA 1/8" MAXI-NITRO CARD**  
NC20 | #NC 20



**20GA OVERSHOT CARDS**  
OS20 | #OS 20



**32GA 1/4" CORK WADS**  
14CW32 | #14CW32



**20GA 1/8" FELT WADS**  
18FW20 | #1221820



**20GA 1/4" FELT WADS**  
14FW20 | #1221420

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 32ga cork or 20ga felt fillers for inside the 20 gauge wads (felt is soft and can be forced into the base of the wad).**

**WARNING:** BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.