



BPI COMPONENT GUIDE:

CSD20

WWW.BALLISTICPRODUCTS.COM


The CSD series of wads offer wide array of capacity options along with a revolutionary energy-absorbing cushion system. These multi-capacity, barrel protecting shotcups are designed for steel, tungsten, and large capacity lead field loads.

The CSD wad series combines easy loading with high performance results. CSD wads are **not** pre-slit. We recommend the GAEP loader-mounted 4-petal wad slitter (top right) or our Stainless Steel Wad Snips (bottom right) to cut the number of petals best suited for your shooting and intended range.



RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and "Load of the Week" at www.ballisticproducts.com**

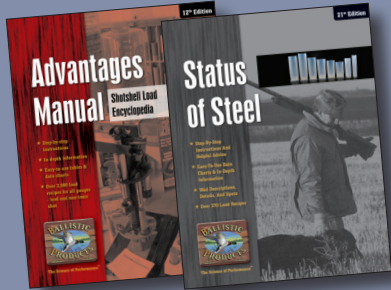

MYLAR: STEEL AND TUNGSTEN SHOTSHELL PELLETS ARE AS HARD OR HARDER THAN A SHOTGUN'S BORE AND BARRELS. BECAUSE THESE PELLETS ARE VERY HARD, THEY ARE ABRASIVE AND CAN CAUSE BARREL DAMAGE IF THE SHOT PROTRUDES THROUGH THE WAD SLIT OR OTHERWISE COMES INTO DIRECT CONTACT WITH THE BORE/BARREL. NO WAD OR COMPONENT CAN ALTER THE REALITY OF PHYSICS. HARD SHOTSHELL PELLETS CAN CAUSE DAMAGE. AS AN INSURANCE POLICY TO REDUCE THE CHANCES OF BARREL DAMAGE DUE TO ABRASIVE PELLETS, MYLAR WRAPS ARE ALWAYS A VERY GOOD IDEA AND MAY BE ADDED TO ANY LOAD.



NOTE: NO WAD CAN COMPLETELY ELIMINATE THE RISK OF SCORING OR ABRASION. PELLET MATERIALS HARDER THAN YOUR GUN'S BARREL CAN STILL CAUSE DAMAGE. HOWEVER, THIS WAD IS MOLDED IN HIGH-DENSITY MATERIAL AND WILL PROVIDE MAXIMUM PROTECTION. FOLLOW ONLY TESTED AND PUBLISHED LOAD DATA. **READ A LOADING MANUAL BEFORE YOU START TO LOAD.**

SPECIFICATIONS	OVERALL LENGTH:	1.660"
	DIAMETER:	0.610"
	SHOTCUP DEPTH:	1.435"
	SEAL TO CUP BOTTOM:	0.225"
	THICKNESS:	0.035"



LD20CSD



WARNING

Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
20-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
150302-6327	20	Cheddite	Ched209	Lil' Gun	34.0		CSD20 (slit)	18FW20 in base		1 1/8	492.2	Lead #5/6		10800	1370
20-GAUGE • 2-3/4" LENGTH • BISMUTH SHOT • FOLD CRIMP															
161012-9071	20	Cheddite	Ched209	Lil' Gun	33.0		CSD20 (slit)			1	437.5	Bismuth #4/6	10gr BSB	10800	1325
20-GAUGE • 2-3/4" LENGTH • BPX DEVASTATOR SHOT • FOLD CRIMP															
11117	20	Fiocchi	Fio616	Steel	22.5		CSD20 (slit)	(2) 18CW28 in base	OS20	1	437.5	BPX-12 #5		11300	1297
20-GAUGE • 2-3/4" LENGTH • HEVI-SHOT • FOLD CRIMP															
150817-7060	20	Cheddite	Ched209	Lil' Gun	46.0		CSD20 (slit)	14FW20 in base		3/4	328.1	Hevi-Shot #4/5		9000	1635
20-GAUGE • 2-3/4" LENGTH • SPHEROTUNGSTEN ORIGINAL-15 SHOT • FOLD CRIMP															
180726-10113	20	Fiocchi	Fio616	Lil' Gun	35.0		CSD20 (slit)	(2) 14FW20 in base	OS20	1	437.5	ST Original-15 #7		6000	1300
20-GAUGE • 2-3/4" LENGTH • SPHEROTUNGSTEN SUPER MAX-18 SHOT • FOLD CRIMP															
11262	20	Fiocchi	Fio616	Longshot	19.8		CSD20 (slit)	(5) 18CW28 in base	OS20	1 1/4	546.9	ST Super Max-18 #9		10845	1095
20-GAUGE • 2-3/4" LENGTH • STEEL SHOT • FOLD CRIMP															
221206-11584	20	Federal Top Gun	Ched209	Steel	22.6		CSD20 (slit)	NC32 in base	OS20	3/4	328.1	Steel #2		11500	1474

OTHER USEFUL COMPONENTS




28GA 1/8" CORK WADS
18CW28 | #18CW28




20GA 1/8" FELT WADS
18FW20 | #1221820



20GA 1/4" FELT WADS
14FW20 | #1221420



20GA OVERSHOT CARDS
OS12 | #OS 12



32GA 1/8" MAXI-NITRO CARDS
NC32 | #NC 32

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 28ga and 32ga filler wads for inside 20ga shotcups.**

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.