



## BPI COMPONENT GUIDE:

# 20GA DISPERSOR-X

WWW.BALLISTICPRODUCTS.COM

The Dispersor-X is our best performer for tight ranges of 5-25 yards. An integrated X-shaped spreader device molded directly into the shotcup provides shooters with even pellet distribution. Its G-type crush section reduces felt recoil in the 20-gauge while allowing a variety of load height adjustments. The pegged dome gas seal effectively distributes fast burn rate powders. Use of an overshoot card helps create a bit of compression which will produce an even pattern distribution. Great for tight-flushing birds, near overhead shots and close crossing targets.


**Overshot Card Wad:** An overshoot card placed over the shot and under the crimp creates a bit of compression against the X-portion of the wad. This compression is helpful in the spreading process as it forces the X-divider to push the pellets into a wide, even pattern distribution.

**MEC Single State Loaders Tip:** Replace the 20ga rammer tube with a 28ga (#130505B 28)

*“★★★★★ - Love these wads These wads work great, they are magic for grouse and woodcock hunting. The pattern distribution was very nice and even too. Quite pleased.”*

## RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. **Therefore, we encourage you to master the information in our manuals, brochures, and “Load of the Week” at [www.ballisticproducts.com](http://www.ballisticproducts.com)**

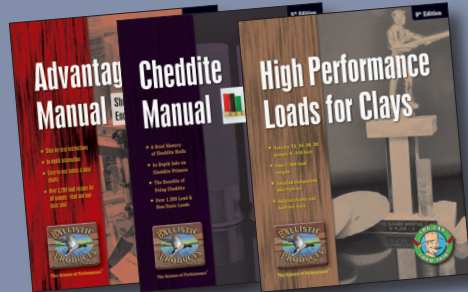

### TECHNICAL SPECS:

OVERALL LENGTH:	1.365"
DIAMETER:	0.610"
SHOTCUP DEPTH:	0.780"
SEAL TO CUP BOTTOM:	0.530"
THICKNESS:	0.035"



LD20DX20



### WARNING

Cancer and Reproductive Harm  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)


LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
20-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
141029-6099	20	Cheddite	Ched209	Green Dot	16.0		DX20		OS20	3/4	328.1	Lead #7		9800	1250
141103-6102	20	Cheddite	Ched209	Herco	22.0		DX20		OS20	3/4	328.1	Lead #8/7.5/7		9900	1385
141029-6097	20	Cheddite	Ched209	International	16.0		DX20		OS20	3/4	328.1	Lead #7		9700	1265
141103-6105	20	Cheddite	Ched209	Unique	19.0		DX20		OS20	3/4	328.1	Lead #8/7.5/7		9700	1285
141029-6100	20	Cheddite	Ched209	Universal	20.0		DX20		OS20	3/4	328.1	Lead #7		10200	1365
161222-9158	20	Cheddite (paper)	Ched209	Green Dot	16.0		DX20		OS20	3/4	328.1	Lead #7/6		8400	1250
90511-831	20	Federal FB	Fed209A	Universal	21.0		DX20		OS20	3/4	328.1	Lead #8.5		10100	1445
100825-2449	20	Winchester AA HS	Win209	International	14.0		DX20			3/4	328.1	NP Lead #8		10400	1245
70625-193B	20	Cheddite	Ched209	International	15.0		DX20		OS20	7/8	382.8	Lead		9400	1200
90908-1290	20	Fiocchi	Fio616	Alliant 20/28	20.0		DX20			7/8	382.8	Lead #8		10500	1380

## OTHER USEFUL COMPONENTS


Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 32ga cork or 20ga felt fillers for inside the 20 gauge wads (felt is soft and can be forced into the base of the wad).**



**20GA 1/8"**  
**MAXI-NITRO CARD**  
**NC20 | #NC 20**



**20GA OVERSHOT**  
**CARDS**  
**OS20 | #OS 20**



**20GA .070"**  
**MINI-NITRO CARD**  
**N720 | #N7 20**

**WARNING:** BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.