



BPI COMPONENT GUIDE:

SPORTING 20 MID

WWW.BALLISTICPRODUCTS.COM


The SG20 Mid is our mid-size option in our line of 20ga sporting wads. The overall length is right between our SG20S and SG20L wads. It is designed to accommodate a wide variety of powders for your most common 7/8-ounce lead shot target loads.

The SG20M produces an expanding pattern of approximately 75% center pattern density and 25% fringe. The cushion section of the SG20-M is comprised of a large tubular reducer that adjusts to many different load heights and offers excellent inertia absorption during the firing process.

“★★★★★ - great wad I reload 20ga shotshells and came across these wads for cheap and thought I could use them for dove. Well, much to my surprise, with a Cheddite new hull and 16 grains of Green Dot 7/8 #5 shot i am shooting a 10” pattern at 25 yards. Love these wads!” - Adam, ND

RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. Therefore, we encourage you to master the information in our manuals, brochures, and “Load of the Week” at www.ballisticproducts.com

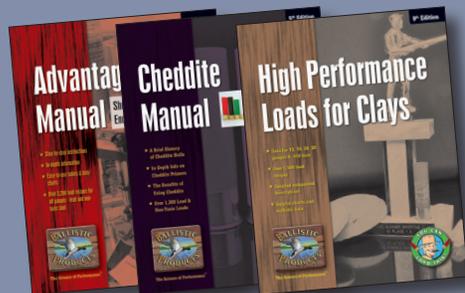

TECHNICAL SPECS:

OVERALL LENGTH:	1.459"
DIAMETER:	0.610"
SHOTCUP DEPTH:	0.745"
SEAL TO CUP BOTTOM:	0.714"
THICKNESS:	0.025"



LD20SG20M



WARNING


Cancer and Reproductive Harm
- www.P65Warnings.ca.gov

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
20-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP															
120514-3895	20	Cheddite	Ched209	Green Dot	16.0		SG20M		0S20	7/8	382.8	Lead #8		10300	1245
120514-3897	20	Cheddite	Ched209	Universal	21.0		SG20M			7/8	382.8	Lead #8		11200	1405
161221-9149	20	Cheddite (paper)	Ched209	Green Dot	16.0		SG20M			7/8	382.8	Lead #7/6		9600	1185
161221-9151	20	Cheddite (paper)	Ched209	Unique	18.0		SG20M			7/8	382.8	Lead #7/6		9300	1210
130218-4608	20	Fiocchi	Fio616	Alliant 20/28	17.0		SG20M			7/8	382.8	Lead #8		9200	1240
120604-3961R	20	Fiocchi	Fio616	Universal	20.0		SG20M		0S20	7/8	382.8	Lead #7.5		10900	1370
161221-9150	20	Cheddite (paper)	Ched209	Unique	16.5		SG20M			1	437.5	Lead #7/6		8900	1100
120604-3970	20	Fiocchi	Fio616	Unique	18.0		SG20M			1	437.5	Lead #7.5		10800	1220
120604-3963R	20	Fiocchi	Fio616	Universal	19.0		SG20M			1	437.5	Lead #7.5		10900	1270

OTHER USEFUL COMPONENTS



20GA 1/8" MAXI-NITRO CARD
NC20 | #NC20



20GA OVERSHOT CARDS
0S20 | #0S20



32GA 1/4" CORK WADS
14CW32 | #14CW32



20GA 1/8" FELT WADS
18FW20 | #1221820



20GA 1/4" FELT WADS
14FW20 | #1221420

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 32ga cork or 20ga felt fillers for inside the 20 gauge wads (felt is soft and can be forced into the base of the wad).**

WARNING: BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.