



BPI COMPONENT GUIDE:

# 20GA TRAP COMMANDER

WWW.BALLISTICPRODUCTS.COM


The Commander is our long-range 20-gauge specialist. It tackles cold weather with an improved, triple gas seal. Four legs in the crush section slowly give away during the loading process, allowing a final nudge as the shell is closed. Loads are perfectly compressed for solid ignition. The TC20 propels a 7/8-ounce charge with a tight center core pattern.

Unbeatable as a clay and field combination wad; 20ga shooters should mix them into their shooting kit the #7-1/2 or high speed #8.

“★★★★★ - **TC20 Pheasant load** I loaded up some 20 ga. shells using the TC20 wad with 24 grains of Longshot and 7/8 oz of NP #5s in Cheddite hulls for a South Dakota Pheasant hunt. Load 70917-68 from the BP book. I shot 15 birds and the dog only had to chase one. Great load.” - DBL

## RECOMMENDED MANUALS

There is so much more to shotshell reloading than just the load data. Safety is your TOP priority. In order to become a safe and competent reloader, one must continue the learning process by reading and researching. Don't try to outsmart the instructions! We offer over a half century of loading knowledge, wit, and wisdom in our publications. Our manuals are continually upgraded with new data and the latest tools and techniques. Available in print version or downloads from our website. Therefore, we encourage you to master the information in our manuals, brochures, and “Load of the Week” at [www.ballisticproducts.com](http://www.ballisticproducts.com)

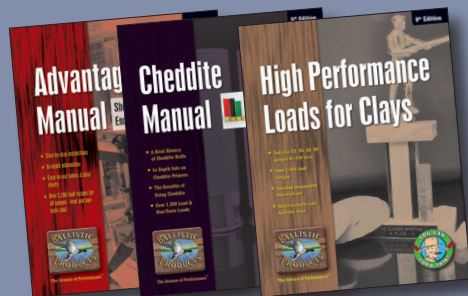

### TECHNICAL SPECS:

OVERALL LENGTH:	1.520"
DIAMETER:	0.615"
SHOTCUP DEPTH:	0.755"
SEAL TO CUP BOTTOM:	0.875"
THICKNESS:	0.025"



LD20TC20



**WARNING**


Cancer and Reproductive Harm  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

LOAD ID	GA.	HULL	PRIMER	POWDER	POWDER GRNS.	GAS SEAL	WAD	FILLER WADS & LOAD INSERTS	OVER SHOT	SHOT (OZ.)	SHOT (GRNS.)	SHOT SIZE	BUFFER (GRAINS)	PSI	FPS
<b>20-GAUGE • 2-3/4" LENGTH • LEAD SHOT • FOLD CRIMP</b>															
180604-10037	20	Cheddite	Ched209	Longshot	27.0		TC20			3/4	328.1	Lead #5/6/7		10085	1660
90930-1420	20	Fiocchi	Fio616	Universal	21.5		TC20		NC20	3/4	328.1	Lead #8		10800	1480
991010-10R	20	Cheddite	Ched209	Blue Dot	26.0		TC20		OS20	7/8	382.8	Lead #5		10500	1340
70917-68	20	Cheddite	Ched209	Longshot	24.0		TC20		OS20	7/8	382.8	Lead #8		10500	1465
131014-5175	20	Cheddite	Ched209	Pro Reach	21.0		TC20			7/8	382.8	Lead #6		11000	1320
230518-11757	20	Federal Top Gun	Ched209	W S Field	18.0		TC20			7/8	382.8	Lead #9		8405	1219
60703-1429	20	Winchester AA HS	Win209	Herco	18.0		TC20			7/8	382.8	Lead		10400	1250
<b>20-GAUGE • 2-3/4" LENGTH • BISMUTH SHOT • FOLD CRIMP</b>															
10964	20	Cheddite	Ched209	Lil' Gun	21.5		TC20		OS20	7/8	382.8	Bismuth	10gr Original	10517	1360
161012-9073	20	Cheddite	Ched209	Longshot	22.0		TC20			7/8	382.8	Bismuth #4/6	8gr BSB	10900	1375
161012-9070	20	Cheddite	Ched209	Pro Reach	20.0		TC20			7/8	382.8	Bismuth #4/6	8gr BSB	10200	1325
180604-10036	20	Cheddite	Ched209	Unique	18.0		TC20			7/8	382.8	Bismuth #5/#6		8640	1270

## OTHER USEFUL COMPONENTS



**20GA 1/8" MAXI-NITRO CARD**  
NC20 | #NC20



**20GA OVERSHOT CARDS**  
OS20 | #OS20



**32GA 1/4" CORK WADS**  
14CW32 | #14CW32



**20GA 1/8" FELT WADS**  
18FW20 | #1221820



**20GA 1/4" FELT WADS**  
14FW20 | #1221420

Filler & cushion wads occupy space below the pellets so that the load can be crimped properly. Remember, different payloads and different pellet sizes occupy different volumes, so you will want an assortment of sizes on hand. Overshot cards improve overall crimp quality and seal in small shot and/or buffer. **We recommend 32ga cork or 20ga felt fillers for inside the 20 gauge wads (felt is soft and can be forced into the base of the wad).**

**WARNING:** BALLISTIC PRODUCTS, INC. DISCLAIMS ALL POSSIBLE LIABILITY FOR DAMAGES, INCLUDING ACTUAL, INCIDENTAL, AND CONSEQUENTIAL, RESULTING FROM USAGE OF INFORMATION OR ADVICE CONTAINED IN THIS AND OTHER PUBLICATIONS, LABELS, CATALOGS AND BOOKLETS. USE DATA AND ADVICE AT YOUR OWN RISK AND WITH CAUTION. WHERE DATA LIST SPECIFIC COMPONENTS, NO CHANGES OR SUBSTITUTIONS FOR THESE COMPONENTS CAN BE MADE WITHOUT RISKING SIGNIFICANT CHANGES IN THE LEVEL OF BALLISTIC PERFORMANCE AND/OR SAFETY OF THE LOADS SHOWN. FOLLOW LOADING DATA EXACTLY AND DO NOT SUBSTITUTE COMPONENTS. WE MAKE NO WARRANTIES EXPRESS OR IMPLIED, LIMITED OR FULL. FAILURE TO COMPLY WITH THESE AND OTHER STANDARDS OF RELOADING MAY RESULT IN ACCIDENTS WITH SERIOUS INJURY AND/OR DEATH TO THE SHOOTER AND/OR BYSTANDERS. KEEP OUT OF REACH OF CHILDREN. WE DISCLAIM ANY AND ALL LIABILITY FOR DAMAGE OR INJURY THAT MAY RESULT FROM YOUR HANDLOADED SHOTSHELLS AS WE HAVE NO CONTROL OVER ANY OF THE NUMEROUS POSSIBLE VARIATIONS IN COMPONENT PRODUCTION LOTS, IN TOOL AND DIE DIMENSIONS, IN YOUR LOADING PRACTICES AND PROCEDURES. THE INDIVIDUAL RELOADER IS SOLELY RESPONSIBLE FOR ANY VARIATION THAT MAY BE INCURRED BY ASSEMBLED AMMUNITION. TO AVOID SERIOUS INJURY OR DEATH TO SHOOTER AND BYSTANDERS, THIS PRODUCT SHOULD ONLY BE USED IN GUNSMITH-INSPECTED GUNS DESIGNED FOR MODERN SHOTSHELLS. IF GUN FAILS TO FIRE, KEEP POINTED IN SAFE DIRECTION FOR 30 SECONDS, THEN UNLOAD CAREFULLY. WEAR EYE AND EAR PROTECTION AND OBSERVE PROPER GUN SAFETY AT ALL TIMES. ALL PRODUCTS SOLD "AS IS".

**ITALICIZED COMPONENTS ARE NO LONGER IN PRODUCTION, BUT MAY STILL BE FOUND IN CIRCULATION. CONSULT YOUR RELOADING MANUAL FOR ADDITIONAL DETAILS AND INFORMATION.**